

SPRT electrical box wiring

Hardware :

Delta 100W servo motor

Electrical PCB board : BKL-DeltaSprt(V1.1.0)

state: There should be enough space to install driver for electrical box and drag chain need to add 2pcs flexible cable


Circuit diagram :

BKL-DeltaSprt(V1.1.0) Board:


J11: 1 pin -----ALM

(connection to CN1-4 of power board ,there is no enough cocker for plug so you need use iron to add the cables for connection ,).

2 pin -----SVON

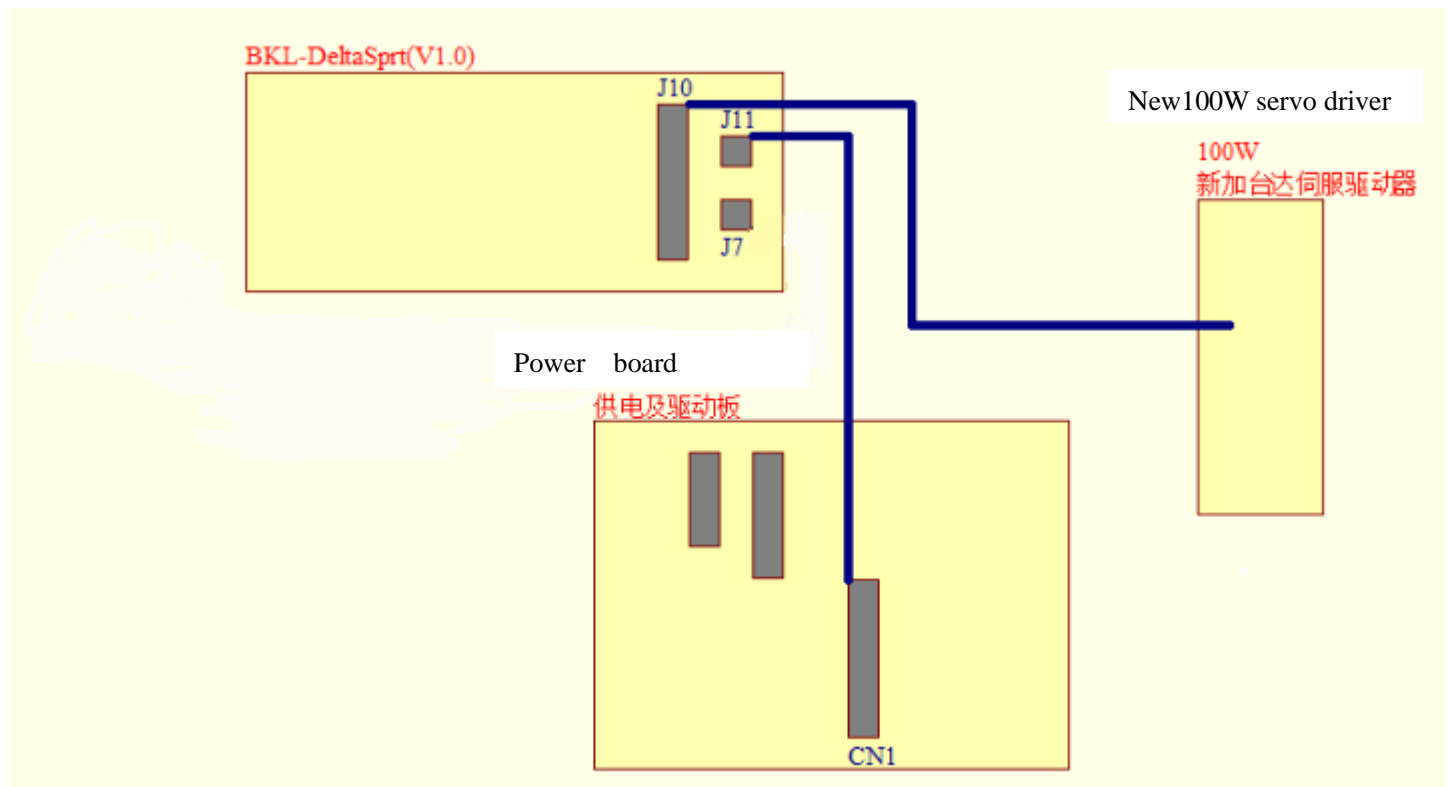

SPRT external cable connection

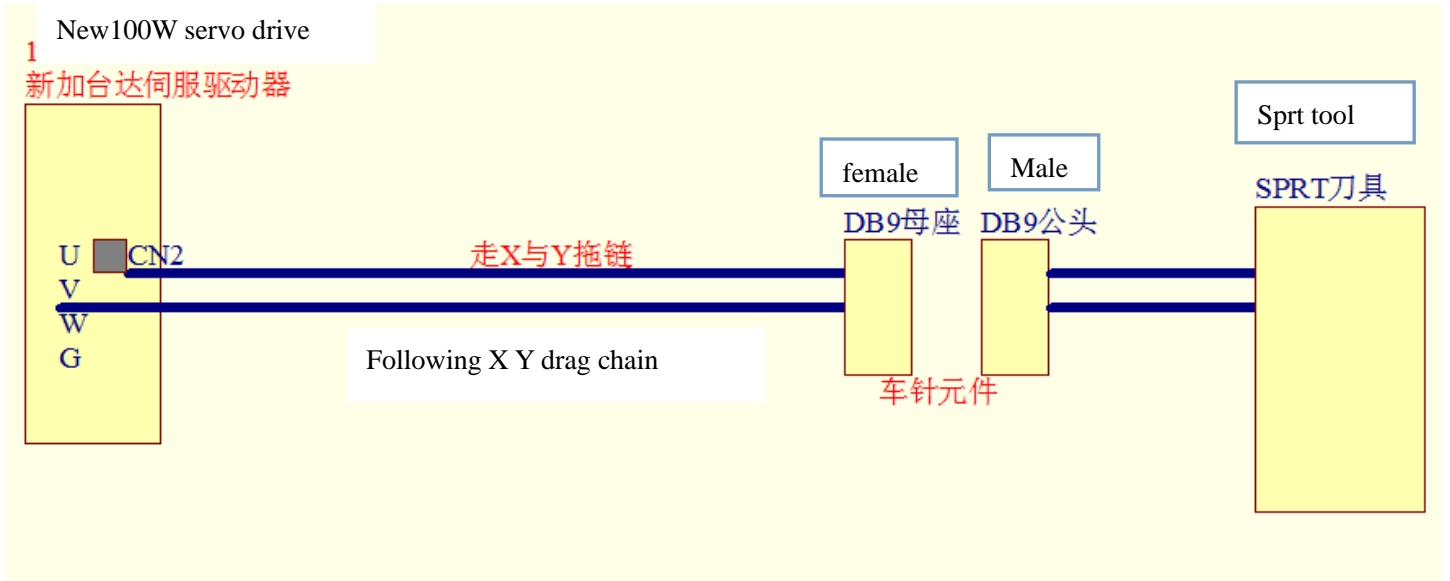

DB9:

DB9 female		DB9 male	encoder pins
CN2(4)-----	1	1 -----	4
CN2(5)-----	2	2 -----	5
CN2(8)-----	3	3 -----	8
CN2(7)-----	4	4 -----	7
CN2(6)-----	5	5 -----	6

DB9 female		DB9 male	power pins
U -----	6	6 -----	U
V -----	7	7 -----	V
W -----	8	8 -----	W
G -----	9	9 -----	G