



1. Open the box, unplug the plug inside.

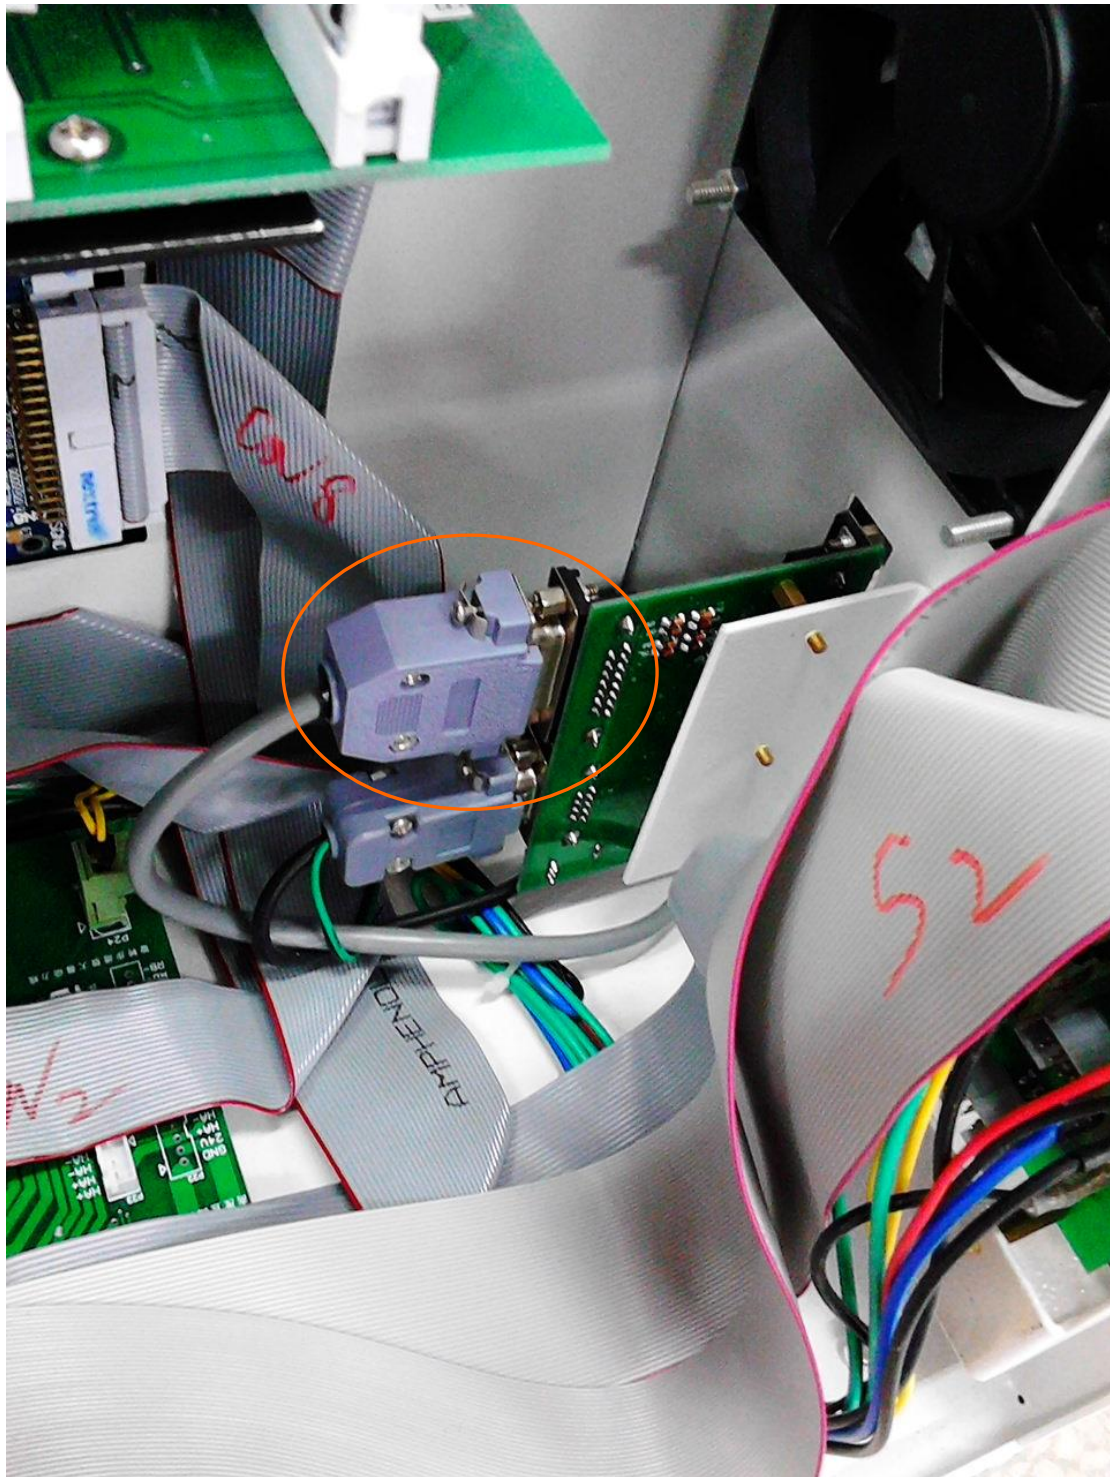

2. Connect the unplugged plug to the plug outside directly

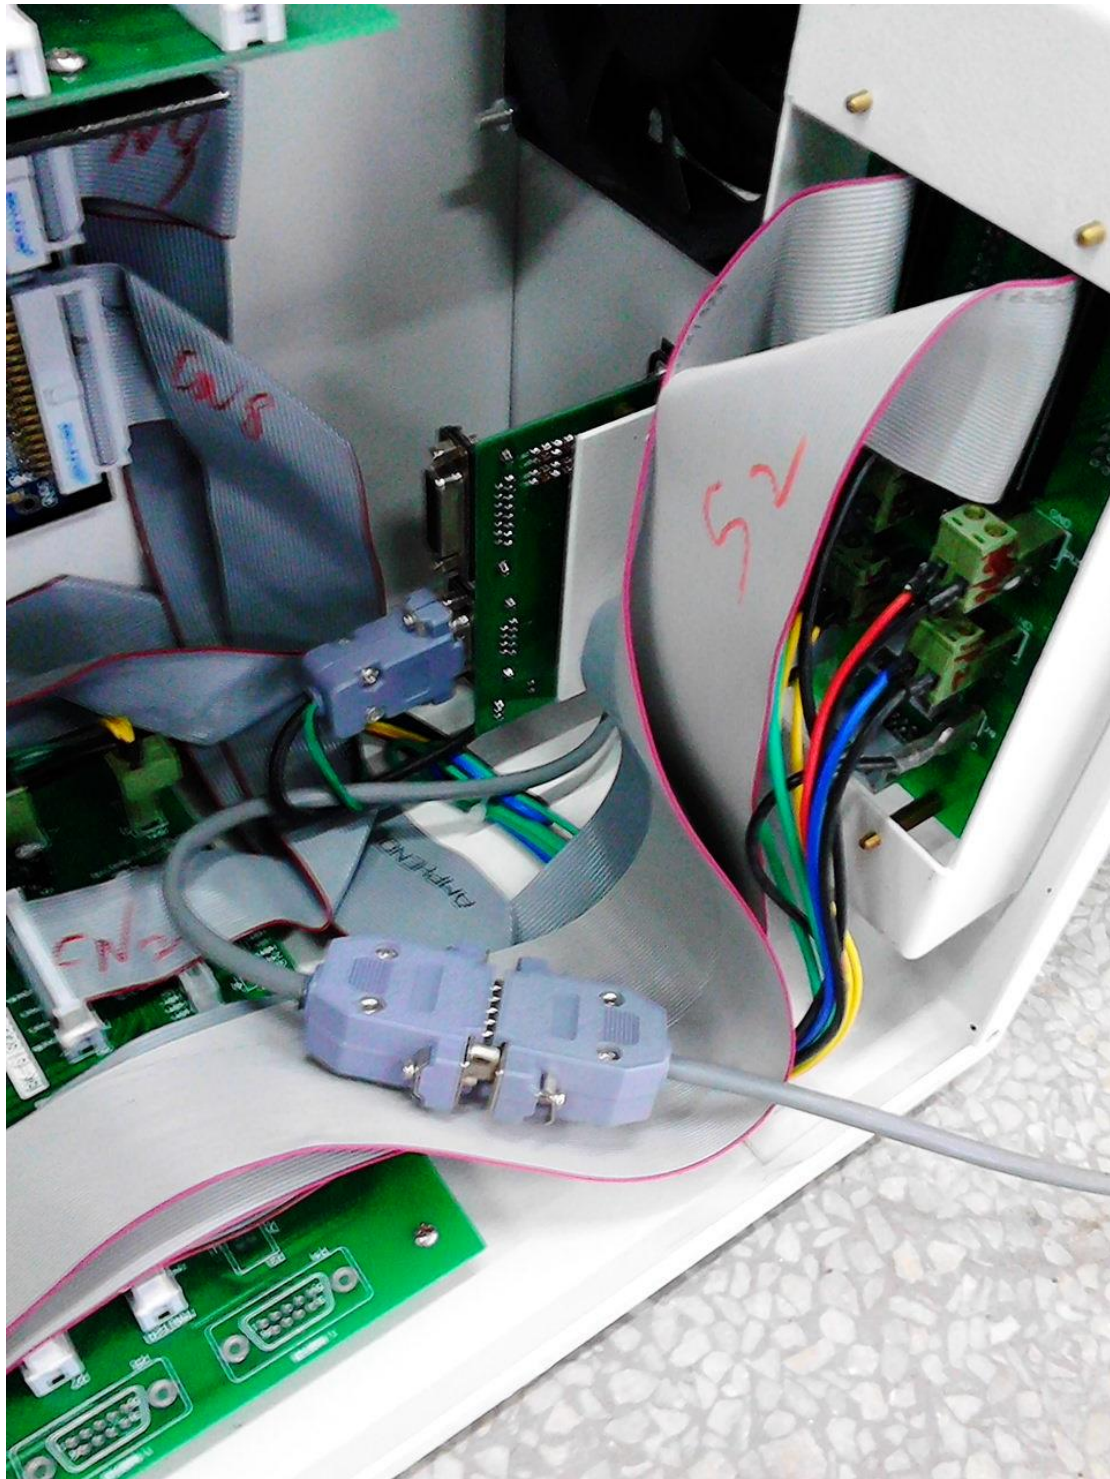

3. Switch on the machine .